

evanescence 6634

Freestanding
66" x 34" x 28"



Product No.

Model Freestanding TMU BEVKRF00T-XX Soaker BEVKRF00N-XX

ThermoMasseur (TMU)

Air Jet System	\$10,420
Jets	38
1 heated backrest & headrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application <i>BUTOUCH</i>	Included
Geysair®	Included
AromaFlow <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,125

Soaker

AromaFlow <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$370

Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 46 US gallons 55 Raised headrests 2	
Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-01</i>	
<input type="radio"/> White 01	Installed & Included
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01	Included

Options UPCHARGE APPLICABLE

Bath Color p.17		
 Black / White 66	\$475	
Finish p.17		
 UltraVelour Matte Finish (white only) <i>BVEL2</i>	\$850	
Universal Armrests <i>BGBGU-XX</i> p.16		
 White 01	\$895	
Bath Pillow <i>BPILOW</i> p.252		
\$240		
Drain & Overflow p.14		
 White 01	Integrated ZenFlow ¹ <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>
 Matte White 32  Chrome 07	Incl.	\$40
 Brushed Nickel 09  Polished Nickel 10	\$40	\$70
 Matte Black 19  Satin Brass 18	\$95	\$125
Island Tub Drain™*** p.15		
Island Tub Drain™ <i>BISLDD</i>	\$260	
Cast Iron Island Tub Drain™ <i>BISLDDCI</i>	\$310	
If Required by Construction Code or installed with ITD		
Brass drain & overflow kit <i>BDRCOB</i>	\$240	
Brass drain kit <i>BDRCB</i>	\$60	

⚠ Don't forget to specify the finish of the Integrated drain & overflow.

† ZenFlow: Integrated overflow without a trim.
* For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.
*** An Island Tub Drain™ is required when there is no access under the bath.




evanescence 6634

Freestanding
66" x 34" x 28"



Evanescence 6634 with AromaFlow

Technical Specifications

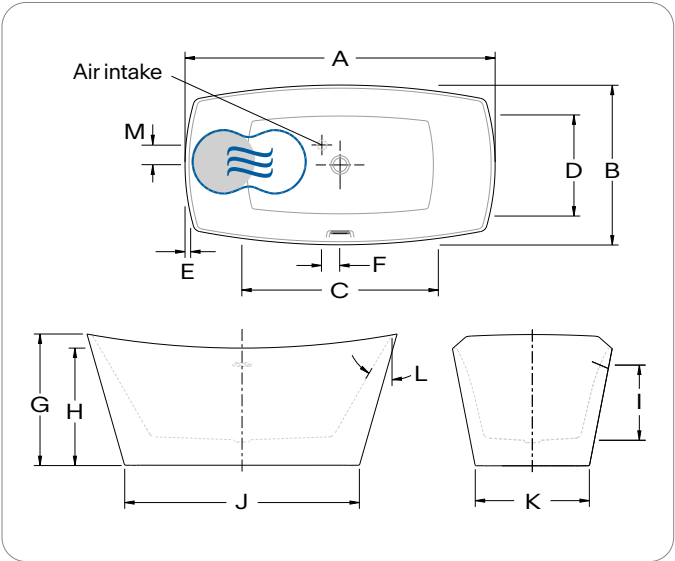

Letter	Description	Measure
A	Total length	66"
B	Total width	34"
C	Bathing well length	41 7/8"
D	Bathing well width	21 1/2"
E	Deck width	1 1/4"
F	Center drain to center air intake	3 7/8"
G	Total height to headrest	28"
H	Minimum height to center	25"
I	Maximum water level Maximum water level with AromaFlow	15 7/8" 15 5/16"
J	Base length	50"
K	Base width	24 1/4"
L	Slope of backrest	31°
M	Center drain to center air intake	4 1/4"

● Indicates heated backrest (TMU) ☉ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the deck of the bath. The water level will vary when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000065
Approx. shipping weight	230 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.