

amma 7242

72" x 42" x 22"



Product No.

Model	TMU BAMVRB00T-XX	Soaker BAMVRB00N-XX
-------	------------------	---------------------

ThermoMasseur (TMU)

Air Jet System	\$8,105
Jets	58
2 heated backrests & headrests**	Included
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$495
Geysair®	Included
AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995














Soaker

AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

Features

Installation Type	Drop-in & Alcove (3 walls)
No. of bathers 2 Imp. gallons 54 US gallons 65 Raised seats 2	
Inverted V 2 Armrests 4 Grab bars (Color match) 2	
Standard Bath Color p.17	
White 01 Biscuit 02	Included


Options UPCHARGE APPLICABLE

Skirt <small>p.254</small>		Multifit <small>BSMUL-XX</small>	SJ-1 <small>BSJ1-XX</small>
 White 01	 Biscuit 02	\$695	\$715
Clear Acrylic Grab Bars <small>BGBG10-XX</small> <small>p.16</small>			
 Chrome 07	 Brushed Nickel 09 inserts	\$60	
Tile Flange (specify front or back) <small>p.15</small>			
Ordered with bath (not installed) <small>BTILEN</small>		\$79	
Factory-installed. Front <small>BTILEF</small> , Back <small>BTILEB</small> , Special installation <small>BTILEO</small>		\$155	
Bath Pillow <small>BPILLOW</small> <small>p.252</small>		\$240	
Comfort Cushion <small>BCUSHIONA</small> <small>p.253</small>		\$540	
 Grey 05	 Black 06		
Drain & Overflow <small>p.14</small>		Integrated ZenFlow! <small>BOVERINZF-XX</small>	Integrated with trim <small>BOVERIN-XX</small>
		16" x 35" <small>BOVER16-XX</small>	
 Chrome 07		\$205	\$235
 White 01	 Biscuit 02	\$165	\$205
 Brushed Nickel 09		\$205	\$235
 Polished Nickel 10		\$205	\$235
 Oil-rubbed Bronze 11		N/A	N/A
 Matte Black 19	 Satin Brass 18	\$260	\$290
		\$290	N/A
If Required by Construction Code			
Brass drain & overflow kit <sup>‡</sup> <small>BDRCOB</small>		\$240	
Brass drain kit <sup>‡</sup> <small>BDRCB</small>		\$60	
16" x 35" Cable driven brass drain & overflow kit <small>BOVERBR</small>		\$240	

† ZenFlow: Integrated overflow without a trim.  
\*\* The AromaCloud® is built into the deck (factory installed).  
‡ When ordered with Integrated drain & overflow.  
‡ The heated backrests & headrests are independently controlled.

amma 7242

72" x 42" x 22"

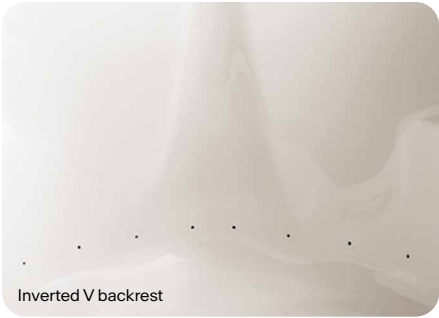


Inverted V backrest



Molded heated headrest

Technical Specifications

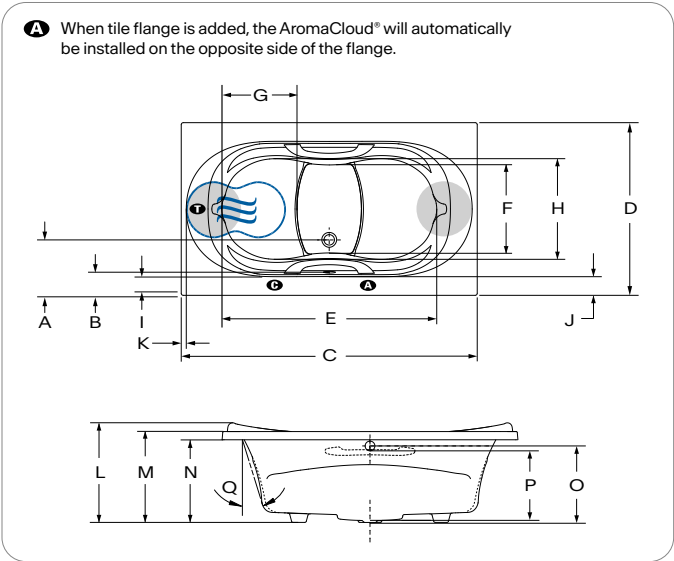

Letter	Description	Measure
A	Outside edge to center drain	13 1/2"
B	Outside edge to overflow	5 3/8"
C	Total length	72 1/4"
D	Total width	42"
E	Bathing well length	52 1/4"
F	Bathing well width at center zone	21 3/8"
G	Raised seat length	18 5/8"
H	Raised seat width	24"
I	Deck width (narrowest point)	4"
J	Deck width (widest point)	5 1/4"
K	Deck width at backrest end	1 1/4"
L	Total height to headrest	24 1/4"
M	Height from bottom of bath to top deck	22 1/8"
N	Height from bottom of bath to bottom of deck	20 1/8"
O	Height from bottom of drain to center of overflow	18 1/8"
P	Maximum water level (Drain & overflow 16" x 35")	16 3/8"
	Maximum water level (Integrated drain & overflow)	17 3/8"
Q	Slope of backrests	18°

**A** AromaCloud® position    **G** Control position when factory-installed (Mia® or DOT)  
**T** Turbine position (TMU)    **H** Indicates heated backrest (TMU)  
**☺** Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is two (2) dedicated breakers: One is 20A, 120 V, 60 Hz, and the other 15A, 120 V, 60 Hz, dedicated lines with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).
	Optional tile flange (specify front or back).

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

Approx. shipping weight	195 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.