

libra oval 6635

Freestanding
66" x 35" x 27"



Product No.

Model	Freestanding	TMU	BLIHOF00T-XX	Soaker	BLIHOF00N-XX
-------	--------------	-----	--------------	--------	--------------

ThermoMasseur (TMU)

Air Jet System	\$9,750
Jets	34
1 heated backrest	Included
MiaPlus® Control†††	Included
BU-Touch Control Application <i>BUTOUCH</i>	Included
Geysair®	Included
AromaFlow†† <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,125

Soaker

AromaFlow†† <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$370

Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 46 US gallons 56 Armrests 2	
Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-01</i>	
<input type="radio"/> White 01	Installed & Included
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01	Included

Options UPCHARGE APPLICABLE


Bath Color p.17		
 Black / White 66	\$475	
Finish p.17		
 UltraVelour Matte Finish (white only) BVEL3	\$1,025	
Bath Pillow BPILLOW p.252	\$240	
Drain & Overflow p.14		
 White 01	Incl.	\$40
 Matte White 32  Chrome 07	\$40	\$70
 Brushed Nickel 09  Polished Nickel 10		
 Matte Black 19  Satin Brass 18	\$95	\$125
Island Tub Drain™*** p.15		
Island Tub Drain™ BISLDD	\$260	
Cast Iron Island Tub Drain™ BISLDDCI	\$310	
If Required by Construction Code		
Brass drain & overflow kit BDRCOB	\$240	
Brass drain kit BDRCB	\$60	

⚠ Don't forget to specify the finish of the Integrated drain & overflow.


† ZenFlow: Integrated overflow without a trim.
††† Control must be wall-mounted. Faucets must be freestanding or wall-mounted.
*** An Island Tub Drain™ is recommended when there is no access under the bath.
†† When ordering an AromaFlow, an Integrated drain & overflow is mandatory (Included). Specify the finish of the drain.

libra oval 6635

Freestanding
66" x 35" x 27"

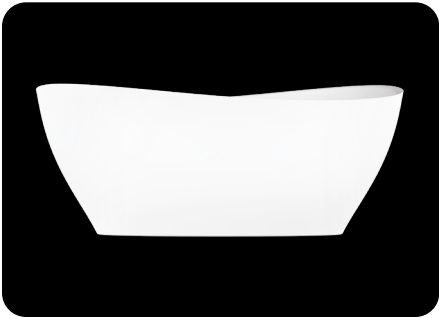

Technical Specifications

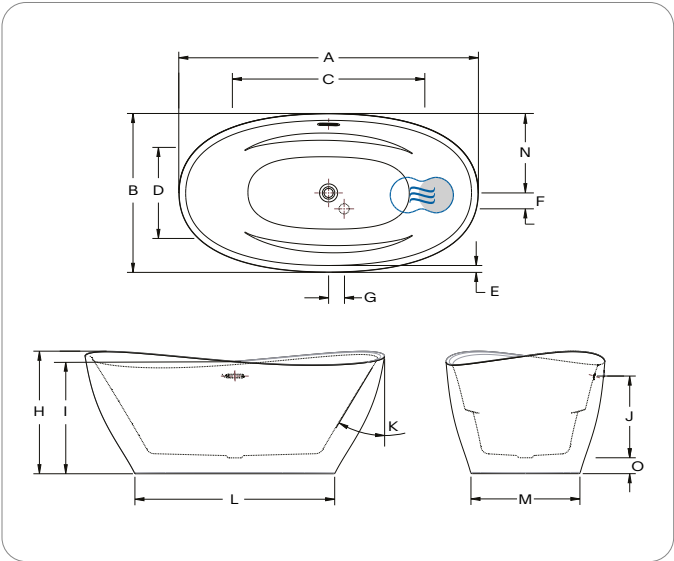

Letter	Description	Measure
A	Total length	66"
B	Total width	35"
C	Bathing well length	42 3⁄8"
D	Bathing well width	23 3⁄16"
E	Deck width	1 1⁄2"
F	Center drain to air intake (side)	3 1⁄2"
G	Center drain to air intake (front)	3 1⁄2"
H	Maximum total height	27"
I	Minimum total height	24"
J	Maximum water level	17 3⁄8"
	Maximum water level with AromaFlow	15 3⁄4"
K	Slope of backrests	31°
L	Base length	44"
M	Base width	18"
N	The outer edge to center of drain	17 1⁄2"
O	Height from drain to floor	3 1⁄2"

● Indicates heated backrest (TMU) ⊕ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Turbine is remotely installed; access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the deck of the bath. The water level will be lower when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000086
Approx. shipping weight	230 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.