

scala 7242

Freestanding
72" x 42" x 25"



Product No.

Model Freestanding TMU BSCVOF00T-XX Soaker BSCVOF00N-XX

ThermoMasseur (TMU)

Air Jet System	\$11,750
Jets	41
1 heated backrest & headrest	Included
MiaPlus® Control†††	Included
BU-Touch Control Application BUTOUCH	Included
Geysair®	Included
AromaFlow BAROMAF	\$950
Illuzio Chromatherapy BCHRO6	\$995
2nd heated backrest (WTS-1 zone) BSHB	\$1,125

Soaker

AromaFlow BAROMAF	\$950
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 63 US gallons 76	
Integrated Drain & Overflow — ZenFlow† BOVERINIZF-01	
○ White 01	Installed & Included
Feet (specify finish) BFEETSC-XX p.16	
● Matte Black 19 ● Satin Brass 18	Installed & Included
Standard Bath Color p.17	
○ White 01	Included

Options UPCHARGE APPLICABLE

Finish p.17	
UltraVelour Matte Finish (white only) BVEL2	\$850
Armrests (2) BGBSC-XX p.16	
○ Chrome 07 ○ Brushed Nickel 09	\$1,950
○ Polished Nickel 10	
● Matte Black 19 ● Satin Brass 18	\$1,300
Feet (specify finish) BFEETSC-XX p.16	
○ Chrome 07 ○ Brushed Nickel 09	\$1,100
○ Polished Nickel 10	
Bath Pillow BPILLOW p.252	\$240
Drain & Overflow p.14	
○ White 01	Incl. \$40
○ Matte White 32 ○ Chrome 07	\$40 \$70
○ Brushed Nickel 09 ○ Polished Nickel 10	
● Matte Black 19 ● Satin Brass 18	\$95 \$125
Island Tub Drain™*** p.15	
Island Tub Drain™ BSLDD	\$260
Cast iron island tub drain™ BSLDDCI	\$310
If Required by Construction Code	
Brass drain & overflow kit BDRCOB	\$240
Brass drain kit BDRCB	\$60


⚠ Don't forget that this model is available in White only. Don't forget to specify the finish of the integrated drain & overflow, feet and armrests.

† ZenFlow: Integrated overflow without a trim.
††† Control and faucet cannot be installed on the deck of the bath.
*** An Island Tub Drain™ is required when there is no access under the bath.



scala 7242

Freestanding
72" x 42" x 25"

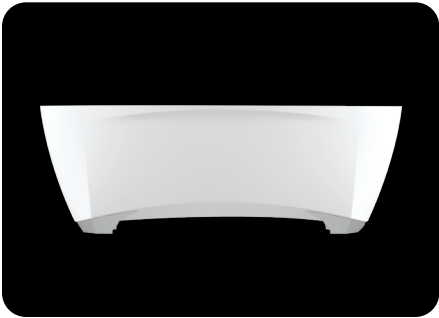


Armrests (2), offered in option



Feet (shown in Matte Black)

Technical Specifications

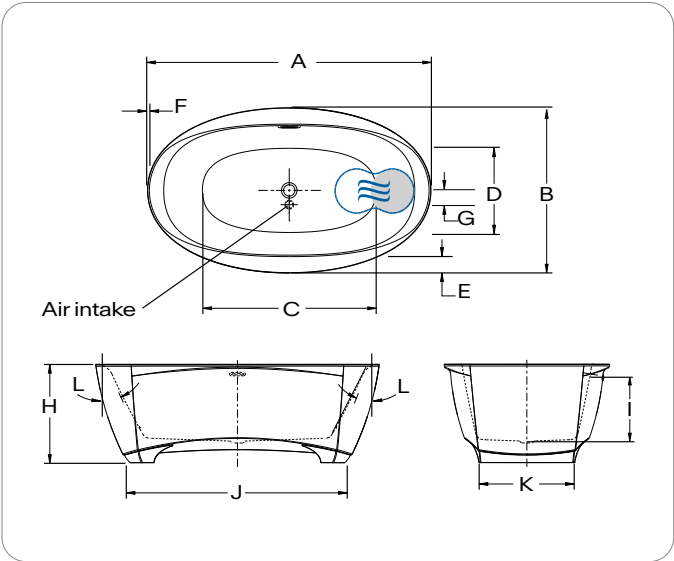

Letter	Description	Measure
A	Total length	72"
B	Total width	42"
C	Bathing well length	50"
D	Bathing well width	26 1/2"
E	Deck width at sides	4 1/8"
F	Deck width at ends	1/2"
G	Center drain to air intake	3 5/8"
H	Total height to headrest	25"
I	Maximum water level Maximum water level with AromaFlow	16 7/8" 15"
J	Base length	54 3/8"
K	Base width	24 1/8"
L	Slope of backrests	27°

● Indicates heated backrest (TMU) ☉ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. TMU: Control must be wall-mounted. Soaker: DOT Control will be installed on bath. The water level will be lower when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000076
Approx. shipping weight	300 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.