

cella 7240

Freestanding
72" x 40" x 27"



With rolled deck

Product No.

Model Flat deck	TMU BBCUOFN0T-XX	Soaker BBCUOFN0N-XX
Model Rolled deck	TMU BBCUOFF0T-XX	Soaker BBCUOFF0N-XX

ThermoMasseur (TMU)

Air Jet System	\$11,100
Jets	40
1 heated backrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application BUTOUCH	Included
Geysair®	Included
AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
2nd heated backrest (WTS-1 zone) BSHB	\$1,125

Soaker

\$8,485

AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

Features

Installation Type	Freestanding
No. of bathers 2 Imp. gallons 49 US gallons 59	
Standard Bath Color p.17	
White 01 Biscuit 02	Included
Claw Feet (specify finish) BFEET-XX p.16	
Chrome 07 Brushed Nickel 09 Polished Nickel 10	
Oil-rubbed Bronze 11 Unplated 00	Included

Options UPCHARGE APPLICABLE

Universal Armrests BGBGU-XX p.16	
White 01	\$895
For Air Supply Only	
Decorative pipe (1½" x 6")	\$55
Decorative pipe (1½" x 24")	\$200
Pipe concealer (3" x 5¼")	\$105
Elbow (45°)	\$80
Elbow (90°)	\$105
Bath Pillow BPILLOW p.252	\$240
Comfort Cushion (with flat deck only) BCUSHIONA p.253	\$540
Grey 05 Black 06	
Drain & Overflow p.14	D13 BOVERD13-XX
Chrome 07	\$500
Brushed Nickel 09	\$500
Polished Nickel 10	\$500
Unplated 00	\$500
Oil-rubbed Bronze 11	\$500

⚠ Don't forget to indicate flat or rolled deck, as well as the selected finish for the claw feet.

* For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.
** The AromaCloud® is built into the deck (factory installed).




cella 7240

Freestanding
72" x 40" x 27"



Technical Specifications

Available with flat or rolled deck.

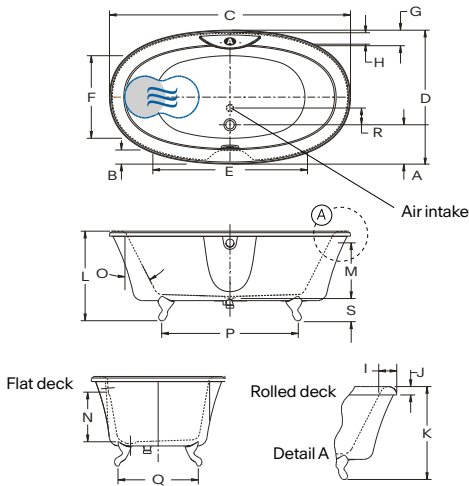

Letter	Description	Measure
A	Outside edge to center drain	11 3/4"
B	Outside edge to overflow	4 3/8"
C	Total length	72"
D	Total width	40"
E	Bathing well length	46 1/8"
F	Bathing well width	24 3/4"
G	Deck width	4 5/8"
H	Flat surface width	3 3/8"
I	Rolled deck width	5 3/8"
J	Height from bottom of lip to top deck	2 1/2"
K	Height from clawfoot to top of lip	27 3/4"
L	Height from clawfoot to top of lip	26 3/4"
M	Height from bottom of drain to center of overflow	16 5/8"
N	Maximum water level	14 7/8"
O	Slope of backrests	27°
P	Length between clawfeet	40 3/4"
Q	Width between clawfeet	24"
R	Center drain to center air intake	5"
S	Clearance from floor to bottom of bath	4 1/2"

Ⓐ AromaCloud® position ● Indicates heated backrest (TMU)
Ⓢ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). There is a height difference for the rolled deck (see drawing Detail A). Faucets must be freestanding or wall-mounted. The turbine must be remotely installed. TMU: Control must be wall-mounted. Soaker: DOT Controls are located on either sides of the AromaCloud® (see page 9, position of DOT Control).

Cutting template	# 90000001
Approx. shipping weight	297 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.