

# naos 6636

Freestanding  
66" x 36" x 25"



With rolled deck

## Product No.

Model Flat deck	TMU BBNLOFN0T-XX	Soaker BBNLOFNON-XX
Model Rolled deck	TMU BBNLOFP0T-XX	Soaker BBNLOFPON-XX

## ThermoMasseur (TMU)

Air Jet System	\$11,240
Jets	38
1 heated backrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application <i>BUTOUCH</i>	Included
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,125

## Soaker

AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$370

## Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 40 US gallons 48	
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Included

## Options UPCHARGE APPLICABLE

Universal Armrests <i>BGBGU-XX</i> <i>p.16</i>	
<input type="radio"/> White 01	\$895
For Air Supply Only	
Decorative pipe (1½" x 6")	\$55
Decorative pipe (1½" x 24")	\$200
Pipe concealer (3" x 5 ¼")	\$105
Elbow (45°)	\$80
Elbow (90°)	\$105
Bath Pillow <i>BPILLOW</i> <i>p.252</i>	\$240
Comfort Cushion (with flat deck only) <i>BCUSHIONA</i> <i>p.253</i>	\$540
<input type="radio"/> Grey 05 <input type="radio"/> Black 06	
Drain & Overflow <i>p.14</i>	D13 <i>BOVERD13-XX</i>
<input type="radio"/> Chrome 07	\$500
<input type="radio"/> Brushed Nickel 09	\$500
<input type="radio"/> Polished Nickel 10	\$500
<input type="radio"/> Unplated 00	\$500
<input type="radio"/> Oil-rubbed Bronze 11	\$500

💡 Don't forget to indicate flat or rolled deck.

\* For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.  
\*\* The AromaCloud® is built into the deck (factory installed).




naos 6636

Freestanding  
66" x 36" x 25"



Technical Specifications

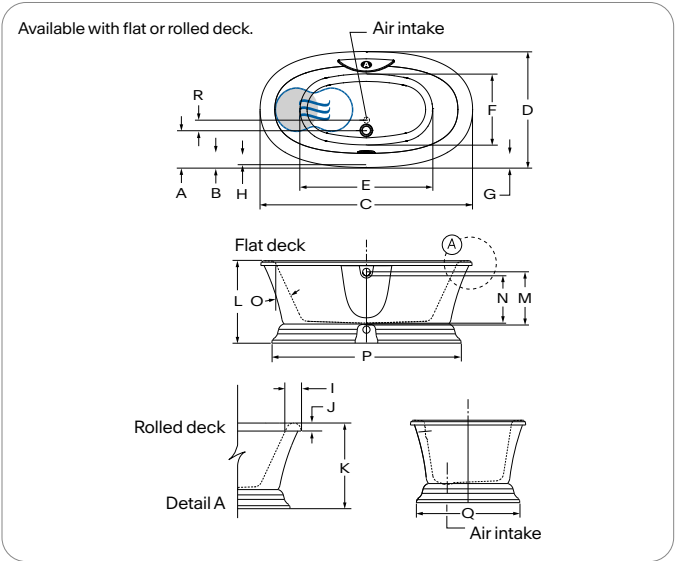

Letter	Description	Measure
A	Outside edge to center drain	11 1/2"
B	Outside edge to overflow	4 5/8"
C	Total length	66"
D	Total width	36"
E	Bathing well length	42 3/8"
F	Bathing well width	22 1/4"
G	Deck width	4 1/4"
H	Flat surface width	3"
I	Rolled deck width	4 3/4"
J	Height from bottom of lip to top deck	2 1/2"
K	Height from bottom of bath to top deck	26 3/4"
L	Height from bottom of bath to top deck	25 3/4"
M	Height from bottom of drain to center of overflow	16 5/8"
N	Maximum water level	14 7/8"
O	Slope of backrests	25°
P	Base length	59 1/8"
Q	Base width	32 1/4"
R	Center drain to center air intake	3 1/4"

● AromaCloud® position ● Indicates heated backrest (TMU)  
⊞ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).  There is a height difference for the rolled deck (see drawing Detail A). Faucets must be freestanding or wall-mounted. The turbine must be remotely installed. TMU: Control must be wall-mounted. Soaker: DOT Controls are located on either sides of the AromaCloud® (see page 9, position of DOT Control).

Cutting template	# 90000055
Approx. shipping weight	265 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.