

sanos 6636

Freestanding
66" x 36" x 24"



With flat deck

Product No.

| | | |
|-------------------|------------------|---------------------|
| Model Flat deck | TMU BBSLOFN0T-XX | Soaker BBSLOFNON-XX |
| Model Rolled deck | TMU BBSLOFP0T-XX | Soaker BBSLOFPON-XX |

ThermoMasseur (TMU)

| | |
|---------------------------------------|----------|
| Air Jet System | \$9,880 |
| Jets | 38 |
| 1 heated backrest | Included |
| MiaPlus® Control* | Included |
| BU-Touch Control Application BUTOUCH | Included |
| Geysair® | Included |
| AromaCloud®** BAROMAC | \$590 |
| Illuzio Chromatherapy BCHRO6 | \$995 |
| 2nd heated backrest (WTS-1 zone) BSHB | \$1,125 |

Soaker

| | |
|------------------------------|-----------------------|
| AromaCloud®** BAROMAC | \$590 |
| Illuzio Chromatherapy BCHRO6 | \$995 |
| WarmTouchShell® BWTS | \$1,125 |
| DOT Control | Included with therapy |
| 2nd WarmTouchShell® BWTS2 | \$370 |

Features

| | |
|---|--------------|
| Installation Type | Freestanding |
| No. of bathers ♀♂ Imp. gallons 40 US gallons 48 | |
| Standard Bath Color p.17 | |
| <input type="radio"/> White 01 <input type="radio"/> Biscuit 02 | Included |

Options UPCHARGE APPLICABLE

| | |
|--|-----------------|
| Universal Armrests BGBGU-XX p.16 | |
| <input type="radio"/> White 01 | \$895 |
| For Air Supply Only | |
| Decorative pipe (1½" x 6") | \$55 |
| Decorative pipe (1½" x 24") | \$200 |
| Pipe concealer (3" x 5 ¼") | \$105 |
| Elbow (45°) | \$80 |
| Elbow (90°) | \$105 |
| Bath Pillow BPILLOW p.252 | \$240 |
| Comfort Cushion (with flat deck only) BCUSHIONA p.253 | \$540 |
| <input type="radio"/> Grey 05 <input type="radio"/> Black 06 | |
| Drain & Overflow p.14 | D13 BOVERD13-XX |
| <input type="radio"/> Chrome 07 | \$500 |
| <input type="radio"/> Brushed Nickel 09 | \$500 |
| <input type="radio"/> Polished Nickel 10 | \$500 |
| <input type="radio"/> Unplated 00 | \$500 |
| <input type="radio"/> Oil-rubbed Bronze 11 | \$500 |

💡 Don't forget to indicate flat or rolled deck.

* For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.
** The AromaCloud® is built into the deck (factory installed).




sanos 6636

Freestanding
66" x 36" x 24"



Technical Specifications

Available with flat or rolled deck.

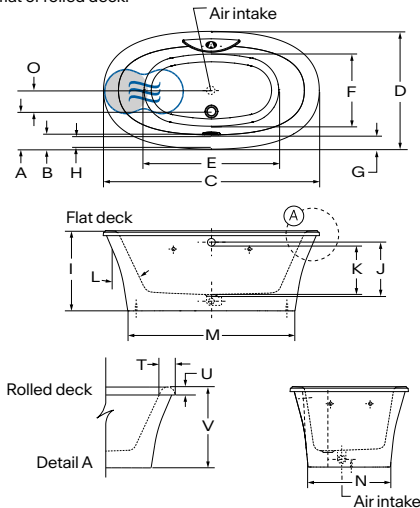

| Letter | Description | Measure |
|--------|---|---------|
| A | Outside edge to center drain | 11 1/2" |
| B | Outside edge to overflow | 4 5/8" |
| C | Total length | 66" |
| D | Total width | 36" |
| E | Bathing well length | 42 3/8" |
| F | Bathing well width | 22 1/4" |
| G | Deck width | 4 1/4" |
| H | Flat surface width | 3" |
| I | Height from bottom of bath to top deck | 24 1/2" |
| J | Height from bottom of drain to center of overflow | 16 5/8" |
| K | Maximum water level | 14 7/8" |
| L | Slope of backrests | 25° |
| M | Base length | 50 7/8" |
| N | Base width | 24 7/8" |
| O | Center drain to center air intake | 3 1/4" |
| T | Rolled deck width | 4 3/4" |
| U | Height from bottom of lip to top deck | 2 1/2" |
| V | Height from bottom of bath to top deck | 25 1/2" |

● AromaCloud® position ● Indicates heated backrest (TMU)
⊞ Indicates WarmTouchShell® position (Soaker)

| | |
|---------------------------|---|
| Hot water supply required | The hot water supply should be 70% or more of the bath's total water capacity. |
| Turbine | Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum. |
| Others | The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). There is a height difference for the rolled deck (see drawing Detail A). Faucets must be freestanding or wall-mounted. The turbine must be remotely installed. TMU: Control must be wall-mounted. Soaker: DOT Controls are located on either sides of the AromaCloud® (see page 9, position of DOT Control). |

| | |
|-------------------------|------------|
| Cutting template | # 90000055 |
| Approx. shipping weight | 240 lb |
| Turbine power | 550 W |
| Air heater | 600 W |

Warranty

| | |
|-----------------------|----------|
| Controls-LED-Geysair* | 5 years |
| Bath & turbine* | 20 years |

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.