

essencia 6838

Freestanding
68" x 38" x 26"



Product No.

Model Freestanding TMU BESPRFOOT-XX Soaker BESPRFOON-XX

ThermoMasseur (TMU)

Air Jet System

\$11,035

Jets	59
1 heated backrest & headrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application <i>BUTOUCH</i>	Included
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995

Soaker

\$7,985

AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy

Features

Installation Type	Freestanding
No. of bathers ½ Imp. gallons 56 US gallons 67 Raised seat 1 Inverted V 1 Armrests 2 Grab bars (Color match) 2 Footrest 1	
Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-01</i>	
<input type="radio"/> White 01	Installed & Included
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01	Included

Options UPCHARGE APPLICABLE

Bath Color <i>p.17</i>						
	Black / White 66			\$475		
Finish <i>p.17</i>						
	UltraVelour Matte Finish (white only) <i>BVEL2</i>			\$850		
Clear Acrylic Grab Bars <i>BGBG10-XX p.16</i>						
	Chrome 07		Brushed Nickel 09 inserts	\$60		
Bath Pillow <i>BPILLOW p.252</i>				\$240		
Comfort Cushion <i>BCUSHIONA p.253</i>				\$540		
	Grey 05		Black 06			
Drain & Overflow <i>p.14</i>		Integrated ZenFlow [†] <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>	16" x 35"*** <i>BOVER16-XX</i>		
	Chrome 07	\$40	\$70	\$95		
	White 01	Incl.	\$40	\$125		
	Brushed Nickel 09		Polished Nickel 10	\$40	\$70	\$235
	Oil-rubbed Bronze 11		N/A	N/A	\$235	
	Matte Black 19		Satin Brass 18	\$95	\$125	N/A
	Matte White 32		\$40	\$70	N/A	

Island Tub Drain™*** *p.15*

Island Tub Drain™ <i>BISLDD</i>	\$260
Cast Iron Island Tub Drain™ <i>BISLDDCI</i>	\$310

If Required by Construction Code or installed with ITD

Brass drain & overflow kit† <i>BDRCOB</i>	\$240
Brass drain kit† <i>BDRCB</i>	\$60
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>	\$240

⚠ Don't forget to specify the finish of the Integrated drain & overflow.

† ZenFlow: Integrated overflow without a trim.

* For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.

** The AromaCloud® is built into the deck (factory installed).

*** An Island Tub Drain™ is required when there is no access under the bath. ITD requires the Brass drain kit (BDRCB) if ordered with the Integrated drain & overflow. ITD requires the 16" x 35" Cable driven brass drain & overflow kit (BOVERBR) if ordered with the 16" x 35" drain & overflow.

† When ordered with Integrated drain & overflow.




essencia 6838

Freestanding
68" x 38" x 26"



Technical Specifications

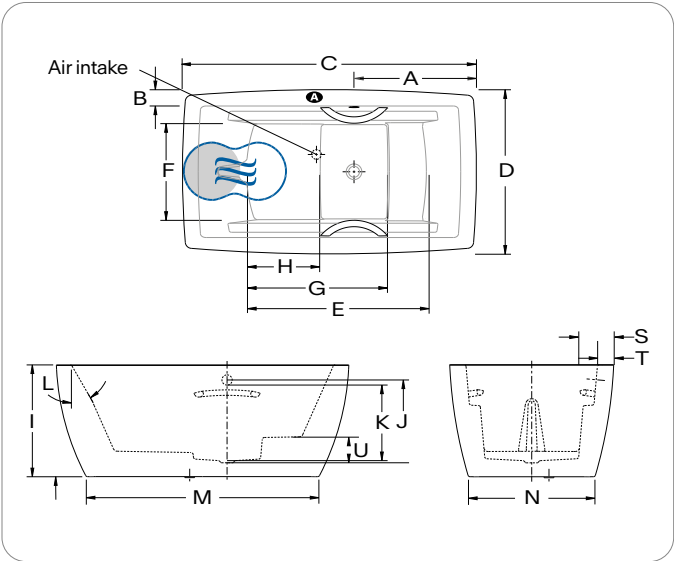

Letter	Description	Measure
A	Outside edge to center drain	28 1/4"
B	Deck width	3 3/4"
C	Total length	68"
D	Total width	38"
E	Bathing well length	42"
F	Bathing well width	22 3/8"
G	Bottom bathing well length	32 3/8"
H	Raised seat length	16 5/8"
I	Height from bottom of bath to top deck	26"
J	Height from bottom of drain to center of overflow	19 3/8"
K	Maximum water level (Drain & overflow 16" x 35")	17 5/8"
	Maximum water level (Integrated drain & overflow)	18 3/8"
L	Slope of backrest	30°
M	Base length	54 1/8"
N	Base width	29 1/4"
S	Minimum spout reach	7 3/4"
T	Outside edge to overflow	4"
U	Height of footrest	5 1/2"
A AromaCloud® position G Indicates heated backrest (TMU) S Indicates WarmTouchShell® position (Soaker)		

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. TMU; Control must be wall-mounted. Soaker: DOT Controls are located on either sides of the AromaCloud®.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000057
Approx. shipping weight	290 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.