

essencia design 7236

Freestanding
72" x 36" x 24"



Product No.

| | | | | | |
|-------|--------------|-----|--------------|--------|--------------|
| Model | Freestanding | TMU | BESSOFN0T-XX | Soaker | BESSOFNON-XX |
|-------|--------------|-----|--------------|--------|--------------|

ThermoMasseur (TMU)

| | |
|---|----------|
| Air Jet System | \$10,535 |
| Jets | 46 |
| 1 heated backrest | Included |
| MiaPlus® Control* | Included |
| BU-Touch Control Application <i>BUTOUCH</i> | Included |
| Geysair® | Included |
| Illuzio Chromatherapy <i>BCHRO6</i> | \$995 |

Soaker

| | |
|-------------------------------------|-----------------------|
| | \$7,660 |
| Illuzio Chromatherapy <i>BCHRO6</i> | \$995 |
| WarmTouchShell® <i>BWTS</i> | \$1,125 |
| DOT Control | Included with therapy |

Features

| | |
|---|----------------------|
| Installation Type | Freestanding |
| No. of bathers | 2 |
| Imp. gallons | 46 |
| US gallons | 55 |
| Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-01</i> | |
| White 01 | Installed & Included |
| Standard Bath Color <i>p.17</i> | |
| White 01 | Included |

Options UPCHARGE APPLICABLE

| | | | |
|--|-------|--|---|
| Bath Color <i>p.17</i> | | | |
|  Black / White 66 | | | \$475 |
| Finish <i>p.17</i> | | | |
|  UltraVelour Matte Finish (white only) <i>BVEL2</i> | | | \$850 |
| Bath Pillow <i>BPILLOW p.252</i> | | \$240 | |
| Drain & Overflow <i>p.14</i> | | | |
|  Chrome 07 | \$40 | Integrated ZenFlow [†] <i>BOVERINZF-XX</i> | Integrated with trim <i>BOVERIN-XX</i> |
|  White 01 | Incl. | | \$40 |
|  Brushed Nickel 09 | \$40 | | \$70 |
|  Polished Nickel 10 | \$40 | | \$70 |
|  Matte Black 19 | \$95 | | \$125 |
|  Satin Brass 18 | | | |
|  Matte White 32 | \$40 | | \$70 |
| Island Tub Drain™*** <i>p.15</i> | | | |
| Island Tub Drain™ <i>BISLDD</i> | \$260 | | |
| Cast Iron Island Tub Drain™ <i>BISLDDCI</i> | \$310 | | |
| If Required by Construction Code or installed with ITD | | | |
| Brass drain & overflow kit <i>BDRCOB</i> | \$240 | | |
| Brass drain kit <i>BDRCB</i> | \$60 | | |

⚠ Don't forget to specify the finish of the Integrated drain & overflow.

† ZenFlow: Integrated overflow without a trim.
* For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.
*** An Island Tub Drain™ is required when there is no access under the bath.




essencia design 7236

Freestanding
72" x 36" x 24"



Technical Specifications

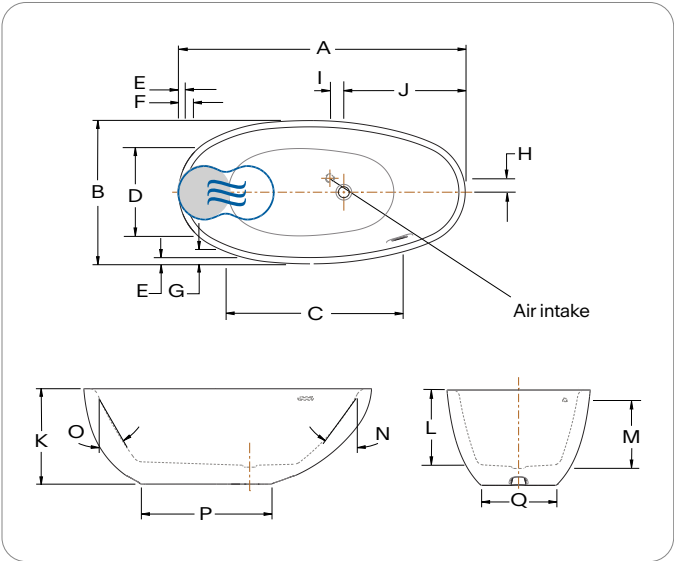

| Letter | Description | Measure |
|--------|--|---------|
| A | Total length | 72" |
| B | Total width | 36" |
| C | Bathing well length (at jets height) | 44 1/8" |
| D | Bathing well width (at jets height) | 22 5/8" |
| E | Deck width (top) | 1 5/8" |
| F | Deck width (backrest round edge) | 3 1/2" |
| G | Deck width (side round edge) | 3 1/8" |
| H | Center drain to center air intake (long axis) | 3 1/2" |
| I | Center drain to center air intake (trans axis) | 3 1/2" |
| J | Center drain to deck edge | 30 1/2" |
| K | Bath height | 24" |
| L | Height from bottom of drain to top of deck | 19 1/4" |
| M | Maximum water level | 16 3/4" |
| N | Slope | 40° |
| O | Slope of backrest | 29° |
| P | Base length | 32 3/8" |
| Q | Base width | 19" |

● Indicates heated backrest (TMU) ☞ Indicates WarmTouchShell® position (Soaker)

| | |
|---------------------------|--|
| Hot water supply required | The hot water supply should be 70% or more of the bath's total water capacity. |
| Turbine | Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum. |
| Others | The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. TMU: Control must be wall-mounted. |

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

| | |
|-------------------------|------------|
| Cutting template | # 90000071 |
| Approx. shipping weight | 305 lb |
| Turbine power | 550 W |
| Air heater | 600 W |

Warranty

| | |
|-----------------------|----------|
| Controls-LED-Geysair* | 5 years |
| Bath & turbine* | 20 years |

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.