

esthesia 6436

Freestanding
64" x 36" x 25"



Product No.

Model Freestanding TMU BEA3RF00T-XX Soaker BEA3RF00N-XX

ThermoMasseur (TMU)

Air Jet System	\$9,510
Jets	38
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application BUTOUCH	\$495
Geysair®	Included
AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
2nd heated backrest (WTS-1 zone) BSHB	\$1,125




Soaker

AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 49 US gallons 59	
Integrated Drain & Overflow — ZenFlow† BOVERINIZF-01	
○ White 01	Installed & Included
Standard Bath Color p.17	
○ White 01	Included

Options UPCHARGE APPLICABLE

Bath Color p.17		
 Black / White 66	\$835	
Finish p.17		
 UltraVelour Matte Finish (white only) <i>BVEL3</i>	\$1,025	
Universal Armrests <i>BGBGU-XX</i> p.16		
 White 01	\$895	
Bath Pillow <i>BPILLOW</i> p.252	\$240	
Drain & Overflow p.14		
 White 01	Integrated ZenFlow™ <i>BOVERINST-XX</i>	Integrated with trim <i>BOVERIN-XX</i>
 Matte White 32  Chrome 07	Incl.	\$40
 Brushed Nickel 09  Polished Nickel 10	\$40	\$70
 Matte Black 19  Satin Brass 18	\$95	\$125
Island Tub Drain™*** p.15		
Island Tub Drain™ <i>BISLDD</i>	\$260	
Cast Iron Island Tub Drain™ <i>BISLDDCI</i>	\$310	
If Required by Construction Code or installed with ITD		
Brass drain & overflowkit <i>BDRCOB</i>	\$240	
Brass drain kit <i>BDRCB</i>	\$60	


⚠ Don't forget to specify the finish of the Integrated drain & overflow.

† ZenFlow: Integrated overflow without a trim.
** The AromaCloud® is built into the deck (factory installed).
*** An Island Tub Drain™ is required when there is no access under the bath.




esthesia 6436

Freestanding
64" x 36" x 25"

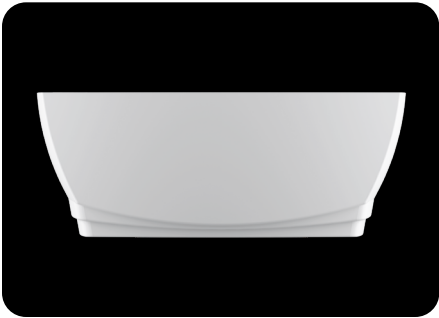

Technical Specifications

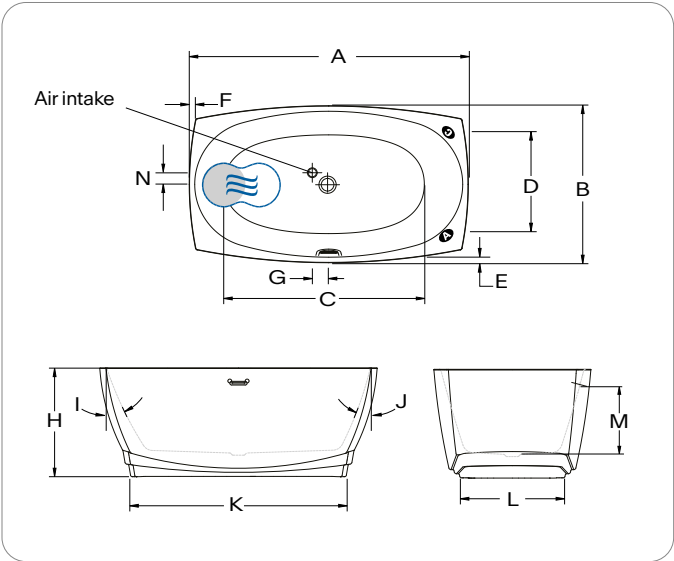

Letter	Description	Measure
A	Total length	64"
B	Total width	36"
C	Bathing well length	47 3/8"
D	Bathing well width	23"
E	Deck width	1 5/8"
F	Deck width at headrest	1 5/8"
G	Center drain to center air intake	3 1/2"
H	Total height	25"
I	Slope of backrest	26°
J	Slope of backrest	21°
K	Base length	49 5/8"
L	Base width	23 7/8"
M	Maximum water level	15 7/8"
N	Center drain to center air intake	2 3/4"

● A AromaCloud® position ● G Control position when factory-installed (Mia® or DOT)
● Indicates heated backrest (TMU) ☐ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000066
Approx. shipping weight	240 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.