

evanescence 5936

Freestanding
59" x 36" x 28"



Product No.

Model Freestanding TMU BEVFOF00T-XX Soaker BEVFOF00N-XX

ThermoMasseur (TMU)

Air Jet System	\$9,325
Jets	35
1 heated backrest & headrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application BUTOUCH	Included
Geysair®	Included
AromaFlow BAROMAF	\$950
Illuzio Chromatherapy BCHRO6	\$995

Soaker

AromaFlow BAROMAF	\$950
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

Features

Installation Type	Freestanding
No. of bathers 1 Imp. gallons 41 US gallons 49 Raised headrest 1	
Integrated Drain & Overflow — ZenFlow† BOVERINIZF-01	
White 01	Installed & Included
Standard Bath Color p.17	
White 01	Included

Options UPCHARGE APPLICABLE

Bath Color p.17		
 Black / White 66	\$475	
Finish p.17		
 UltraVelour Matte Finish (white only) <i>BVEL2</i>	\$850	
Universal Armrests <i>BGBGU-XX</i> p.16		
 White 01	\$895	
Bath Pillow <i>BPILLOW</i> p.252		
\$240		
Drain & Overflow p.14		
 White 01	Integrated ZenFlow ¹ <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>
 Chrome 07	Incl.	\$40
 Matte White 32	\$40	\$70
 Brushed Nickel 09		
 Polished Nickel 10		
 Matte Black 19	\$95	\$125
 Satin Brass 18		
Island Tub Drain™*** p.15		
Island Tub Drain™ <i>BISLDD</i>	\$260	
Cast Iron Island Tub Drain™ <i>BISLDDCI</i>	\$310	
If Required by Construction Code or installed with ITD		
Brass drain & overflow kit <i>BDRCOB</i>	\$240	
Brass drain kit <i>BDRCB</i>	\$60	

⚠ Don't forget to specify the finish of the Integrated drain & overflow.

† ZenFlow: Integrated overflow without a trim.
* For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.
*** An Island Tub Drain™ is required when there is no access under the bath.




evanescence 5936

Freestanding
59" x 36" x 28"



Technical Specifications

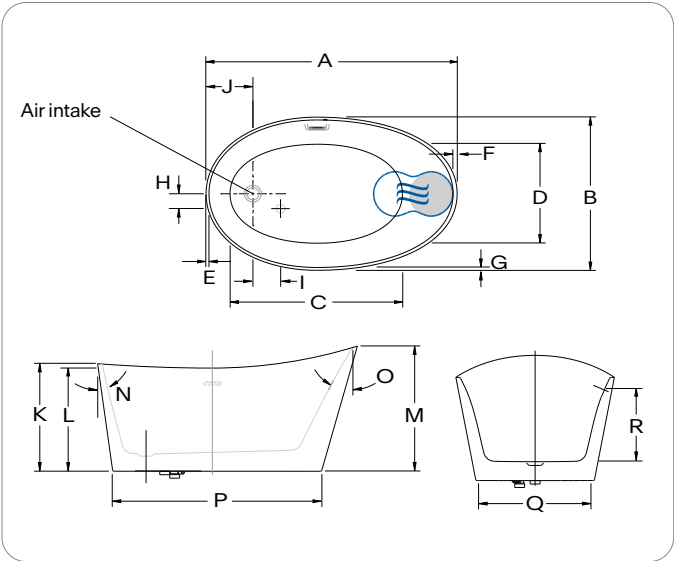

Letter	Description	Measure
A	Total length	59"
B	Total width	36"
C	Bathing well length	41 1/2"
D	Bathing well width	23 7/8"
E	Deck width at drain end	1"
F	Deck width at headrest	1 1/8"
G	Deck width	1 1/8"
H	Center bath drain to air intake	3 1/2"
I	Center bath drain to air intake	6 1/2"
J	Outside edge to center bath drain	11"
K	Total height	24 1/2"
L	Minimum height of bath	23 1/2"
M	Total height to headrest	28 1/2"
N	Slope at drain end	12°
O	Slope of backrest	31°
P	Base length	47 3/8"
Q	Base width	26 7/8"
R	Maximum water level Maximum water level with AromaFlow	15 7/8" 15 9/16"

● Indicates heated backrest (TMU) ☞ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the deck of the bath. The water level will vary when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000069
Approx. shipping weight	220 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.