

# libra 6632

Freestanding  
66" x 32" x 23"



## Product No.

Model Freestanding      TMU BLIIRFO0T-XX      Soaker BLIIRFOON-XX

## ThermoMasseur (TMU)

Air Jet System

**\$8,850**

Jets	42
1 heated backrest	Included
MiaPlus® Control†††	Included
BU-Touch Control Application <i>BUTOUCH</i>	Included
Geysair®	Included
AromaFlow <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,125

## Soaker

**\$6,500**

AromaFlow <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$370

## Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 52 US gallons 63	
Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-01</i>	
<input type="radio"/> White 01	Installed & Included
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01	Included

## Options UPCHARGE APPLICABLE

<b>Bath Color</b> <i>p.17</i>		
<input checked="" type="radio"/> Black / White 66		\$475
<b>Finish</b> <i>p.17</i>		
<input type="radio"/> UltraVelour Matte Finish (white only) <i>BVEL2</i>		\$850
<b>Universal Armrests</b> <i>BGBGU-XX p.16</i>		
<input type="radio"/> White 01		\$895
<b>Bath Pillow</b> <i>BPILOW p.252</i>		\$240
<b>Drain &amp; Overflow</b> <i>p.14</i>		
<input type="radio"/> White 01		Incl. \$40
<input type="radio"/> Matte White 32	<input type="radio"/> Chrome 07	\$40 \$70
<input type="radio"/> Brushed Nickel 09	<input type="radio"/> Polished Nickel 10	
<input type="radio"/> Matte Black 19	<input type="radio"/> Satin Brass 18	\$95 \$125
<b>Island Tub Drain™***</b> <i>p.15</i>		
Island Tub Drain™ <i>BISLDD</i>		\$260
Cast Iron Island Tub Drain™ <i>BISLDDCI</i>		\$310
<b>If Required by Construction Code or installed with ITD</b>		
Brass drain & overflow kit <i>BDRCOB</i>		\$240
Brass drain kit <i>BDRCB</i>		\$60

⚠ Don't forget to specify the finish of the Integrated drain & overflow.

† ZenFlow: Integrated overflow without a trim.

††† Control must be wall-mounted. Faucets must be freestanding or wall-mounted.

\*\*\* An Island Tub Drain™ is recommended when there is no access under the bath.




# libra 6632

Freestanding  
66" x 32" x 23"



## Technical Specifications

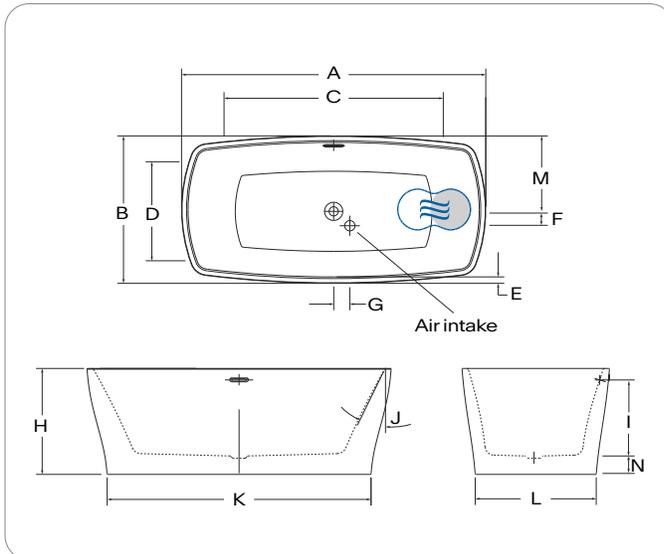

Letter	Description	Measure
A	Total length	66"
B	Total width	32"
C	Bathing well length	47 1/2"
D	Bathing well width	21 1/2"
E	Deck width	1 3/8"
F	Center drain to air intake (side)	3 1/8"
G	Center drain to air intake (front)	3 1/2"
H	Total height	23"
I	Maximum water level Maximum water level with AromaFlow	16 3/8" 14 3/4"
J	Slope of backrests	26°
K	Base length	57 1/4"
L	Base width	26 1/4"
M	The outer edge to center of drain	16 3/8"
N	Height from drain to floor	3 1/2"

● Indicates heated backrest (TMU)    ⊕ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Turbine is remotely installed; access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the deck of the bath. The water level will be lower when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

Cutting template	# 90000082
Approx. shipping weight	240 lb
Turbine power	550 W
Air heater	600 W

## Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.