

# meridian 6032

60" × 32" × 21"



## Product No.

Model Alcove, Right	TMU BMEDRIORT-XX	Soaker BMEDRIORN-XX
Model Alcove, Left	TMU BMEDRIOLT-XX	Soaker BMEDRIOLN-XX
Model Drop-in	TMU BMEDRIOOT-XX	Soaker BMEDRIOON-XX

## ThermoMasseur (TMU)

Air Jet System	\$4,885
Jets	37
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995

## Soaker

AromaCloud®** <i>BAROMAC</i>	\$590
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy

## Features

Installation Type	Drop-in & Alcove (3 walls)
No. of bathers  Imp. gallons 41 US gallons 50	
Integrated Tile Flange (specify right or left)	Included
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Included



## Options UPCHARGE APPLICABLE

Skirt <i>p.254</i>	Multifit <i>BSMUL-XX</i>	SJ-1 <i>BSJ1-XX</i>
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	\$695	\$715
Bath Pillow <i>BPILLOW p.252</i>	\$240	
Comfort Cushion <i>BCUSHIONA p.253</i>	\$540	
<input type="radio"/> Grey 05 <input type="radio"/> Black 02		
Drain & Overflow <i>p.14</i>	Integrated ZenFlow <sup>†</sup> <i>BOVERINF-XX</i>	16" x 35" <i>BOVER16-XX</i>
<input type="radio"/> Chrome 07	\$205	\$260
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	\$165	\$290
<input type="radio"/> Brushed Nickel 09	\$205	\$290
<input type="radio"/> Polished Nickel 10	\$205	\$290
<input type="radio"/> Oil-rubbed Bronze 11	N/A	\$400
<input type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18	\$260	N/A
If Required by Construction Code		
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>	\$240	

<sup>†</sup> ZenFlow: Integrated overflow without a trim.  
<sup>\*\*</sup> The AromaCloud® is built into the deck (factory installed).


# meridian 6032

60" × 32" × 21"

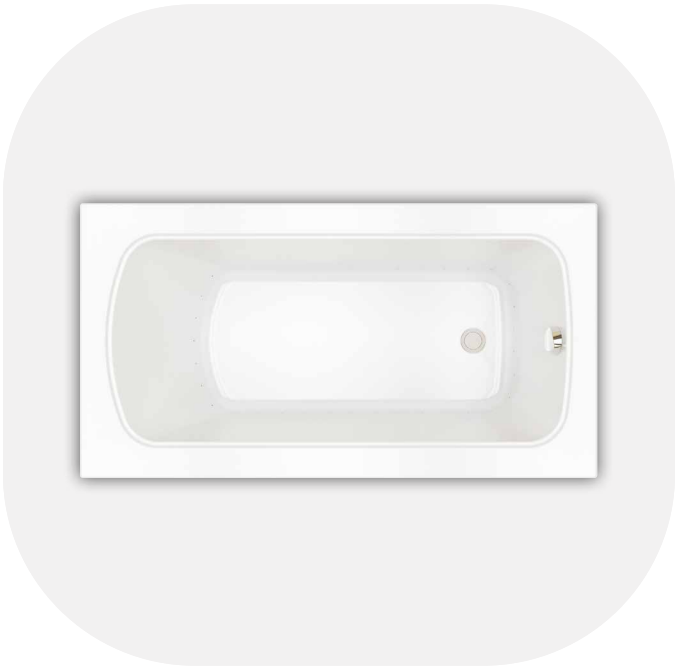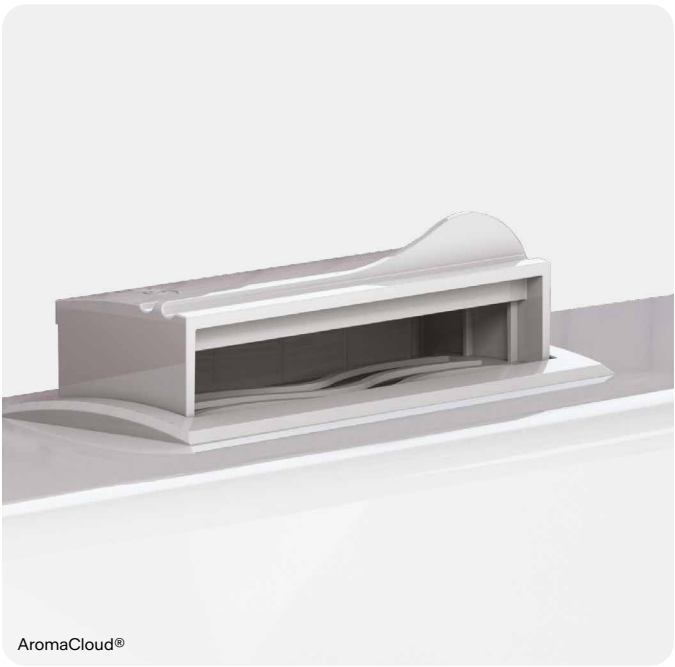

## Technical Specifications

- A** Deck modified to host the AromaCloud®.  
When tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.

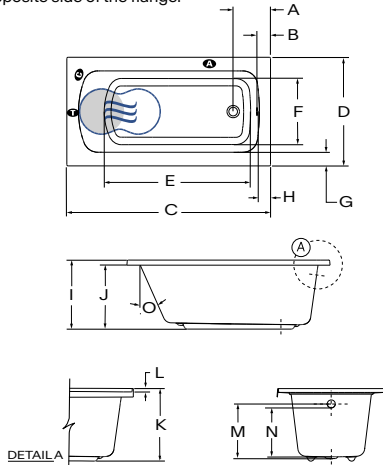

Letter	Description	Measure
A	Outside edge to center drain	11"
B	Outside edge to overflow	4"
C	Total length	60"
D	Total width	32"
E	Bathing well length	43 5/8"
F	Bathing well width	19 5/8"
G	Deck width	4 1/4"
H	Deck width at drain end	3 1/2"
I	Height from bottom of bath to top deck	20 1/2"
J	Height from bottom of bath to bottom of deck	19"
K	Height from bottom of bath to top of tile flange	21 1/2"
L	Tile flange height	1"
M	Height from bottom of drain to center of overflow	15 13/16"
N	Maximum water level (Drain & overflow 16" x 35")	14 1/16"
O	Slope of backrest	24°

- A** AromaCloud® position    **B** Control position when factory-installed (Mia® or DOT)  
**T** Turbine position (TMU)    **●** Indicates heated backrest (TMU)  
**☺** Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). There is a height difference for the integrated tile flange (see Detail A).

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

Cutting template	# 90000053
Approx. shipping weight	100 lb
Turbine power	550 W
Air heater	600 W

## Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.