

nokori 6935

Freestanding
69" x 35" x 24"



Product No.

Model	Freestanding	TMU	BNOVRF00T-XX	Soaker	BNOVRF00N-XX
-------	--------------	-----	--------------	--------	--------------

ThermoMasseur (TMU)

Air Jet System	\$10,620
Jets	44
1 heated backrest	Included
MiaPlus® Control†††	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaFlow†† <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,125

Soaker

AromaFlow†† <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control (not installed)	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$370

Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 65 US gallons 77 Brass drain kit	Included
Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-01</i>	
<input type="radio"/> White 01	Installed & Includedd
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01	Included

Options UPCHARGE APPLICABLE

Finish <i>p.17</i>		
UltraVelour Matte Finish (white only) <i>BVEL2</i>		\$850
Universal Armrests <i>BGBGU-XX p.16</i>		
<input type="radio"/> White 01		\$895
Tile Flange (specify position) <i>p.15</i>		
Ordered with bath (not installed) <i>BTILEN</i>		\$79
Factory-installed. Right <i>BTILER</i> , Left <i>BTILEL</i> , Front <i>BTILEF</i> , Back <i>BTILEB</i> , Special installation <i>BTILEO</i>		\$155
Bath Pillow <i>BPILLOW p.252</i>		\$240
Drain & Overflow <i>p.14</i>		
<input type="radio"/> White 01		Incl. \$40
<input type="radio"/> Matte White 32 <input type="radio"/> Chrome 07		\$40 \$70
<input type="radio"/> Brushed Nickel 09 <input type="radio"/> Polished Nickel 10		
<input type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18		\$95 \$125
Air Intake††† & Island Tub Drain™**** <i>p.15</i>		
Air intake & Island Tub Drain™ <i>BAIRISLD</i>		\$350
Island Tub Drain™ <i>BISLDD</i>		\$260
Cast iron island tub drain™ <i>BISLDDCI</i>		\$310
Air intake <i>BAIRINT</i>		\$120
Air intake installation		\$285 net
If Required by Construction Code		
Brass drain & overflow kit <i>BDRCOB</i>		\$240

⚠ Don't forget that this bath is available in White only.


If turbine is installed under the bath, follow Nokori Installation Manual instructions.

† ZenFlow: Integrated overflow without a trim.
†† When ordering an AromaFlow. Specify the finish of the drain.
††† Control must be wall-mounted. Faucets must be freestanding or wall-mounted.
†††† Air Intake is required when turbine is installed under the bath.
**** An Island Tub Drain™ is required when there is no access under the bath.




nokori 6935

Freestanding
69" x 35" x 24"

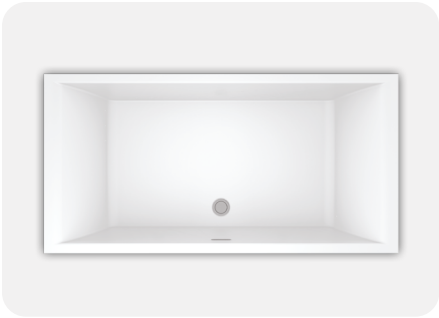

Technical Specifications

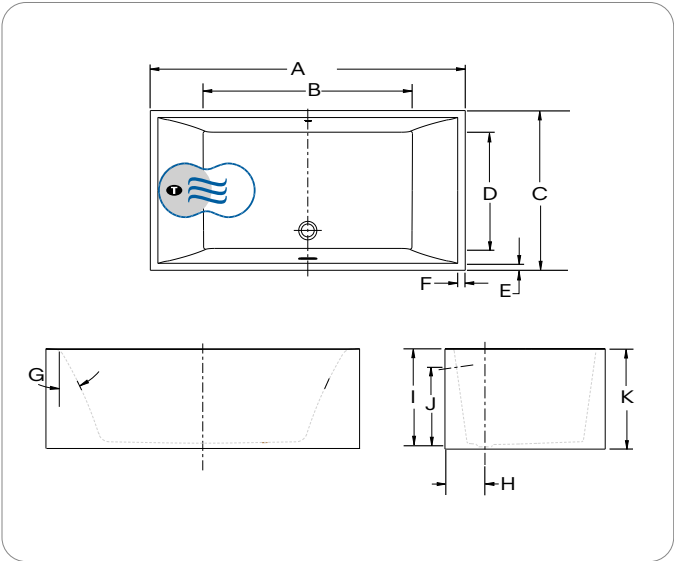

Letter	Description	Measure
A	Total length	69"
B	Bathing well length	45"
C	Total width	35"
D	Bathing well width	26 1/4"
E	Deck width	2"
F	Deck width at backrest ends	1 5/8"
G	Slope of backrests	24°
H	Outside edge to center of drain	8 3/4"
I	Height from bottom of drain to top of deck	21"
J	Maximum water level	16 3/4"
	Maximum water level with AromaFlow	16 1/4"
K	Total height	24 1/2"

❶ Turbine position (TMU) ● Indicates heated backrest (TMU)
☞ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 8 sq. in. minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).
	Faucet must be freestanding or wall-mounted. Controls cannot be installed on the bath.
	The turbine should be remotely installed. The turbine can also be installed under the bath. Please refer to the Nokori Installation Instructions. The water level will be lower when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Approx. shipping weight	300 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.