

# nokori oval 6737

Freestanding  
67" x 37" x 24"



## Product No.

Model	Freestanding	TMU	BNOPOF00T-XX	Soaker	BNOPOF00N-XX
-------	--------------	-----	--------------	--------	--------------

## ThermoMasseur (TMU)

Air Jet System	\$10,380
Jets	40
1 heated backrest	Included
MiaPlus® Control†††	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaFlow†† <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
2nd heated backrest (WTS-1 zone) <i>BSHB</i>	\$1,125

## Soaker

AromaFlow†† <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control (not installed)	Included with therapy
2nd WarmTouchShell® <i>BWTS2</i>	\$370

## Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 55 US gallons 66 Brass drain kit	Included
Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-01</i>	
<input type="radio"/> White 01	Installed & Included
Standard Bath Color <i>p.17</i>	
<input type="radio"/> White 01	Included

## Options UPCHARGE APPLICABLE

<b>Bath Color</b> p.17		
 Black / White 66	\$475	
<b>Finish</b> p.17		
UltraVelour Matte Finish (white only) <i>BVEL2</i>	\$850	
<b>Universal Armrests</b> <i>BGBGU-XX</i> p.16		
 White 01	\$895	
<b>Bath Pillow</b> <i>BPILOW</i> p.252	\$240	
<b>Drain &amp; Overflow</b> p.14		
 White 01	Integrated ZenFlow <sup>®</sup> <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>
 Matte White 32  Chrome 07	Incl.	\$40
 Brushed Nickel 09  Polished Nickel 10	\$40	\$70
 Matte Black 19  Satin Brass 18	\$95	\$125
<b>Island Tub Drain™***</b> p.17		
Island Tub Drain™ <i>BISLDD</i>	\$260	
Cast iron Island Tub Drain™ <i>BISLDDCI</i>	\$310	
<b>If Required by Construction Code</b>		
Brass drain & overflow kit <i>BDRCOB</i>	\$240	


† ZenFlow: Integrated overflow without a trim.  
†† When ordering an AromaFlow, an Integrated drain & overflow is mandatory (Included).  
††† Control must be wall-mounted. Faucets must be freestanding or wall-mounted.  
\*\*\* An Island Tub Drain™ is required when there is no access under the bath.

# nokori oval 6737

Freestanding  
67" x 37" x 24"



## Technical Specifications

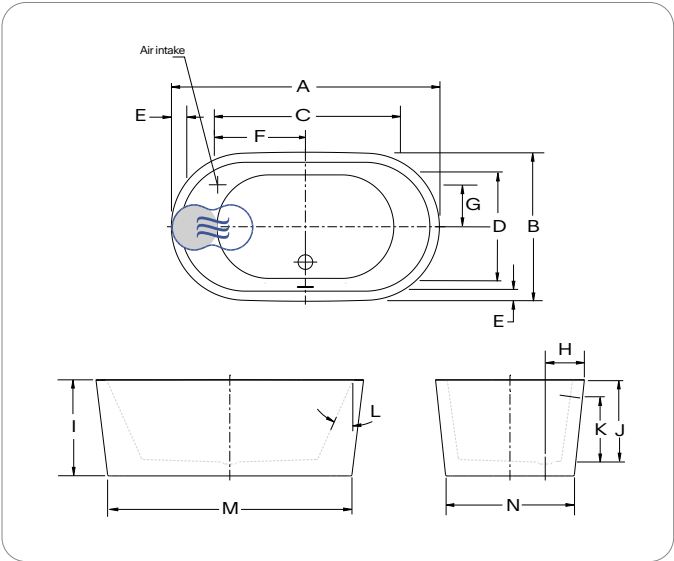

Letter	Description	Measure
A	Total length	66 1/2"
B	Total width	37"
C	Bathing well length	45 3/4"
D	Bathing well width	26 1/4"
E	Deck width	2 7/8"
F	Air intake to center of drain (long axis)	21 3/4"
G	Air intake to center of drain (trans axis)	10 3/8"
H	Center of drain to deck side	9 3/4"
I	Total height	24"
J	Height from bottom of drain to top of deck	20 1/2"
K	Maximum water level	16 1/4"
	Maximum water level with AromaFlow	15 5/8"
L	Slope of backrests	24°
M	Base length	60 3/4"
N	Base width	32"

● Indicates heated backrest (TMU)    ■ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 8 sq. in. minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).  Faucet must be freestanding or wall-mounted. Controls cannot be installed on the bath. The turbine should be remotely installed. The water level will be lower when an AromaFlow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

Cutting template	# 90000072
Approx. shipping weight	270 lb
Turbine power	550 W
Air heater	600 W

## Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.