

opalia 6839 Oblique Ellipse - Right

Freestanding
68" x 39" x 25"



Product No.

Model Freestanding TMU BOPPOFXRT-XX Soaker BOPPOFXRN-XX

ThermoMasseur (TMU)

Air Jet System	\$8,815
Jets	35
1 heated backrest	Included
MiaPlus® Control (not installed)	Included
BU-Touch Control Application BUTOUCH	\$495
Geysair®	Included
AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
2nd heated backrest (WTS-1 zone) BSHB	\$1,125

Soaker

AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control (not installed)	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 42 US gallons 51	
Integrated Drain & Overflow — ZenFlow† BOVERINIZF-01	
○ White 01	Installed & Included
Standard Bath Color p.17	
○ White 01	Included

Options UPCHARGE APPLICABLE

Bath Color p.17		
 Black / White 66	\$475	
Finish p.17		
 UltraVelour Matte Finish (white only) <i>BVEL2</i>	\$850	
Universal Armrests <i>BGBGU-XX</i> p.16		
 White 01	\$895	
Bath Pillow <i>BPILLOW</i> p.252	\$240	
Drain & Overflow p.14		
 White 01	Incl.	\$40
 Matte White 32	 Chrome 07	\$40
 Brushed Nickel 09	 Polished Nickel 10	\$70
 Matte Black 19	 Satin Brass 18	\$95
Island Tub Drain™*** p.15		
Island Tub Drain™ <i>BISLDD</i>		\$260
Cast Iron Island Tub Drain™ <i>BISLDDCI</i>		\$310

⚠ Don't forget to specify the finish of the Integrated drain & overflow.

Faucets must be freestanding or wall-mounted.

† ZenFlow: Integrated overflow without a trim.
** The AromaCloud® is built into the deck (factory installed).
*** An Island Tub Drain™ is required when there is no access under the bath.




opalia 6839 Oblique Ellipse - Right

Freestanding
68" x 39" x 25"



Technical Specifications

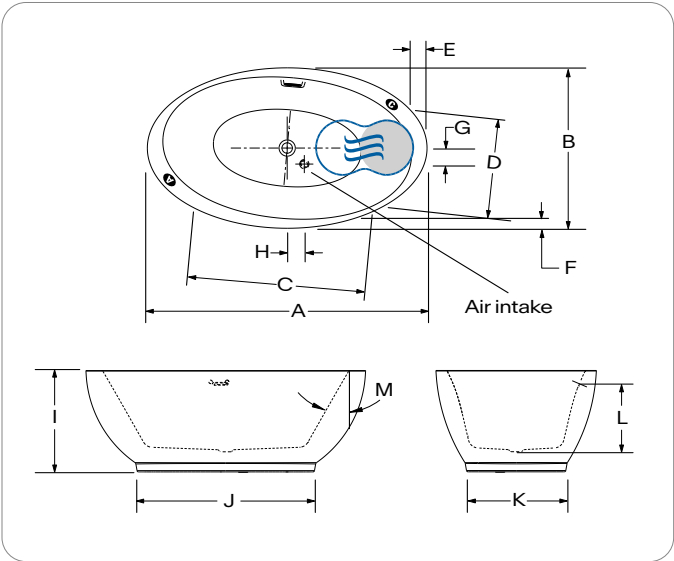

Letter	Description	Measure
A	Total length	68"
B	Total width	39"
C	Bathing well length	41 5/8"
D	Bathing well width	23 5/8"
E	Deck width (backrests)	3 7/8"
F	Deck width (center)	2 3/8"
G	Air intake to center of drain (long axis)	3 7/8"
H	Air intake to center of drain (trans. axis)	4 1/4"
I	Total height	24 3/4"
J	Length of the base	43"
K	Width of the base	24"
L	Maximum water level	15 1/8"
M	Slope of backrests	31°

Ⓐ AromaCloud® position Ⓑ Control position when factory-installed (Mia® or DOT)
● Indicates heated backrest (TMU) ⊕ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000073
Approx. shipping weight	230 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.