

opalia 6839 Off-Centered Ellipse - Left

Freestanding
68" x 39" x 25"



Product No.

Model Freestanding TMU BOPPOFOLT-XX Soaker BOPPOFOLN-XX

ThermoMasseur (TMU)

Air Jet System	\$8,815
Jets	35
1 heated backrest	Included
MiaPlus® Control (not installed)	Included
BU-Touch Control Application BUTOUCH	\$495
Geysair®	Included
AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
2nd heated backrest (WTS-1 zone) BSHB	\$1,125

Soaker

AromaCloud®** BAROMAC	\$590
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy
2nd WarmTouchShell® BWTS2	\$370

Features

Installation Type	Freestanding
No. of bathers ♀♂ Imp. gallons 42 US gallons 51	
Integrated Drain & Overflow — ZenFlow† BOVERINIZF-01	
○ White 01	Installed & Included
Standard Bath Color p.17	
○ White 01	Included

Options UPCHARGE APPLICABLE

Bath Color p.17		
☑ Black / White 66		\$475
Finish p.17		
○ UltraVelour Matte Finish (white only) BVEL2		\$850
Universal Armrests BGBGU-XX p.16		
○ White 01		\$895
Bath Pillow BPILLOW p.252		\$240
Comfort Cushion BCUSHIONA p.253		\$540
○ Grey 05 ● Black 02		
Drain & Overflow p.14	Integrated ZenFlow† BOVERINZF-XX	Integrated with trim BOVERIN-XX
○ White 01	Incl.	\$40
○ Matte White 32 ○ Chrome 07		
○ Brushed Nickel 09 ○ Polished Nickel 10		\$40 \$70
● Matte Black 19 ● Satin Brass 18		\$95 \$125
Island Tub Drain™*** p.15		
Island Tub Drain™ BISLDD		\$260
Cast Iron Island Tub Drain™ BISLDDCI		\$310

⚠ Don't forget to specify the finish of the Integrated drain & overflow. Faucets must be freestanding or wall-mounted.

† ZenFlow: Integrated overflow without a trim.
** The AromaCloud® is built into the deck (factory installed).
*** An Island Tub Drain™ is required when there is no access under the bath.




opalia 6839 Off-Centered Ellipse - Left

Freestanding
68" x 39" x 25"



Technical Specifications

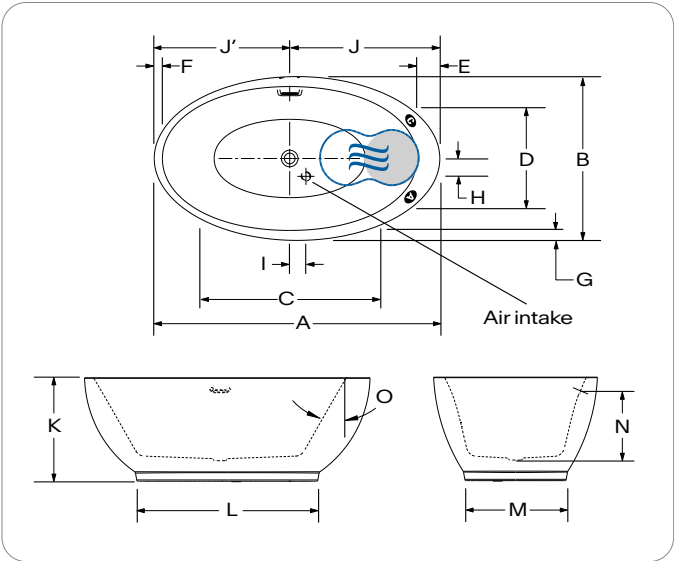

Letter	Description	Measure
A	Total length	68"
B	Total width	39"
C	Bathing well length	41 5/8"
D	Bathing well width	23 5/8"
E	Deck width (backrest)	5 1/2"
F	Deck width (feet)	2"
G	Deck width (center)	2 3/8"
H	Air intake to center of drain (long axis)	4 1/4"
I	Air intake to center of drain (trans. axis)	3 7/8"
J	Center of drain to edge of backrest	35 3/4"
J'	Center of drain to edge of backrest	32 1/4"
K	Total height	24 3/4"
L	Length of the base	43"
M	Width of the base	24"
N	Maximum water level	15 7/8"
O	Slope of backrests	31°

● AromaCloud® position ● Control position when factory-installed (Mia® or DOT)
● Indicates heated backrest (TMU) ● Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000073
Approx. shipping weight	230 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.