

# origami 6636

66" x 36" x 22"



## Product No.

Model 4" deck	TMU BOOLRI00T-XX	Soaker BOOLRI00N-XX
Model 2" deck	TMU BOOLRI20T-XX	Soaker BOOLRI20N-XX
Model Slim deck	TMU BOOLRI10T-XX	Soaker BOOLRI10N-XX

## ThermoMasseur (TMU)

Air Jet System	\$6,425
Jets	40
1 heated backrest	Included
MiaPlus® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
AromaCloud®** <i>BAROMAC</i>	\$590
AromaFlow†† <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995

## Soaker

AromaCloud®** <i>BAROMAC</i>	\$590
AromaFlow†† <i>BAROMAF</i>	\$950
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy

## Features

Installation Type	Drop-in: 1/2", 2" & 4" & Alcove (3 walls): 2"
No. of bathers ↓ Imp. gallons 52 US gallons 62	
Standard Bath Color p.17	
<input type="checkbox"/> White 01 <input type="checkbox"/> Biscuit 02	Included

## Options UPCHARGE APPLICABLE

<b>Finish</b> p.17			
<input type="checkbox"/> UltraVelour Matte Finish (white only) <i>BVEL1</i>		\$650	
<b>Universal Armrests</b> <i>BGBGU-XX</i> p.16			
<input type="checkbox"/> White 01		\$895	
<b>Skirt (2" deck only)</b> p.254			
<input type="checkbox"/> White 01	<input type="checkbox"/> Biscuit 02	\$600	\$715
<b>Tile Flange (with 2" deck only) (specify right or left)</b> p.15			
Ordered with bath (not installed) <i>BTILEN</i>		\$79	
Factory-installed, Right <i>BTILER</i> , Left <i>BTILEL</i> , Special installation <i>BTILEO</i>		\$155	
<b>Bath Pillow</b> <i>BPILLOW</i> p.252			
		\$240	
<b>Drain &amp; Overflow</b> p.14			
<input type="checkbox"/> Chrome 07		\$205	\$235 \$260
<input type="checkbox"/> White 01	<input type="checkbox"/> Biscuit 02	\$165	\$205 \$290
<input type="checkbox"/> Brushed Nickel 09		\$205	\$235 \$400
<input type="checkbox"/> Polished Nickel 10		\$205	\$235 \$400
<input type="checkbox"/> Oil-rubbed Bronze 11		N/A	N/A \$400
<input type="checkbox"/> Matte Black 19	<input type="checkbox"/> Satin Brass 18	\$260	\$290 N/A
<input type="checkbox"/> Matte White 32		\$205	\$235 N/A
<b>If Required by Construction Code</b>			
Brass drain & overflow kit† <i>BDRCOB</i>		\$240	
Brass drain kit† <i>BDRCB</i>		\$60	
16" x 35" Cable driven brass drain & overflow kit <i>BOVERBR</i>		\$240	

⚠ Don't forget to indicate the deck height (1/2", 2" or 3 1/4").

Slim deck are available for Drop-in installation only.

† ZenFlow: Integrated overflow without a trim.

\*\* The AromaCloud® is built into the deck (factory installed).

‡ When ordered with Integrated drain & overflow.

†† When ordering an AromaFlow, a ZenFlow is mandatory (Upcharge). Specify the finish of the drain.


# origami 6636

66" x 36" x 22"



## Technical Specifications

**A** When tile flange is added, the AromaCloud® will automatically be installed on the opposite side of the flange.

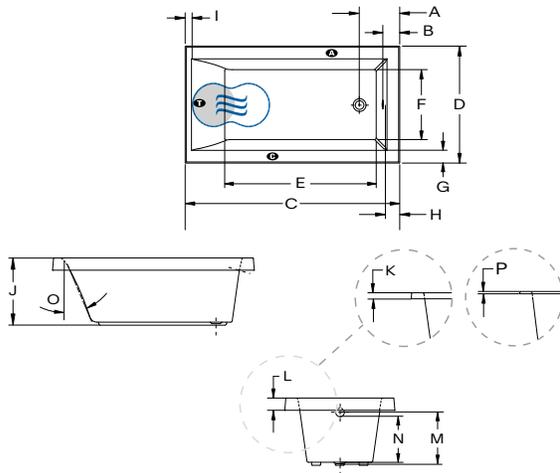

Letter	Description	Measure
A	Outside edge to center drain	12 3/8"
B	Outside edge to overflow	4 5/8"
C	Total length (with 1/2" deck height) Total length (with 2" deck height) Total length (with 4" deck height)	65 5/8" 65 7/8" 66 1/4"
D	Total width (with 1/2" deck height) Total width (with 2" deck height) Total width (with 4" deck height)	35 1/2" 35 3/4" 36 1/8"
E	Bathing well length	47 1/4"
F	Bathing well width	22 1/4"
G	Deck width	4 1/2"
H	Deck width at drain end	4 1/2"
I	Deck width at backrest	1 5/8"
J	Height from bottom of bath to top deck	21 7/8"
K	Height from bottom of deck to top deck	2"
L	Height from bottom of deck to top deck	4"
M	Height from bottom of drain to center of overflow	17 1/4"
N	Maximum water level (Drain & overflow 16" x 35") Maximum water level (Integrated drain & overflow) Maximum water level with AromaFlow	15 1/2" 17" 16 1/2"
O	Slope of backrest	24°
P	Height from bottom of deck to top deck	1/2"

**A** AromaCloud® position      **B** Control position when factory-installed (Mia® or DOT)  
**T** Turbine position (TMU)      **●** Indicates heated backrest (TMU)  
**☒** Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access).  Optional Tile Flange (specify right or left). The water level will vary when an AromaFlow or an Integrated drain & overflow is installed.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/dealers/dealer-documentation-and-catalog](http://www.bainultra.com/dealers/dealer-documentation-and-catalog)).

Cutting template	# 90000047
Approx. shipping weight	135 lb
Turbine power	550 W
Air heater	600 W

## Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.