

vibe 5828

Freestanding
58" x 28" x 21"



Product No.

Model	Freestanding	TMU	BVICRFOOT-XX	Soaker	BVICRFOON-XX
-------	--------------	-----	--------------	--------	--------------

ThermoMasseur (TMU)

Air Jet System	\$8,655
Jets	40
1 heated backrest	Included
MiaPlus® Control†††	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$495
Geysair®	Included
Illuzio Chromatherapy <i>BCHRO6</i>	\$995

Soaker

	\$6,430
Illuzio Chromatherapy <i>BCHRO6</i>	\$995
WarmTouchShell® <i>BWTS</i>	\$1,125
DOT Control	Included with therapy

Features

Installation Type	Freestanding
No. of bathers ♀ Imp. gallons 36 US gallons 44	
Integrated Drain & Overflow — ZenFlow† <i>BOVERINIZF-01</i>	
○ White 01	Installed & Included
Standard Bath Color <i>p.17</i>	
○ White 01	Included

Options UPCHARGE APPLICABLE

Bath Color p.17			
 Black / White 66			\$475
Finish p.17			
UltraVelour Matte Finish (white only)	<i>BVEL2</i>		\$850
Universal Armrests <i>BGBGU-XX</i> p.16			
 White 01			\$895
Bath Pillow <i>BPILLOW</i> p.252			
Drain & Overflow p.14		Integrated ZenFlow ¹ <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>
 White 01		Incl.	\$40
 Matte White 32	 Chrome 07	\$40	\$70
 Brushed Nickel 09	 Polished Nickel 10		
 Matte Black 19	 Satin Brass 18	\$95	\$125
Island Tub Drain™*** p.15			
Island Tub Drain™ <i>BISLDD</i>			\$260
Cast iron island tub drain™ <i>BISLDDCI</i>			\$310
If Required by Construction Code			
Brass drain & overflow Kit <i>BDRCOB</i>			\$240
Brass drain kit <i>BDRCB</i>			\$60

💡 Don't forget to specify the finish of the Integrated drain & overflow.

† ZenFlow: Integrated overflow without a trim.
††† Control must be wall-mounted. Faucets must be freestanding or wall-mounted.
*** An Island Tub Drain™ is required when there is no access under the bath.




vibe 5828

Freestanding
58" x 28" x 21"



Technical Specifications

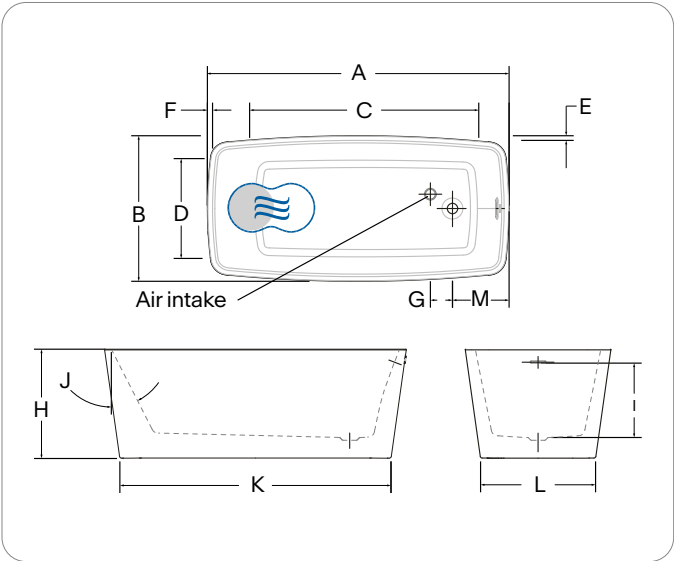

Letter	Description	Measure
A	Total length	58"
B	Total width	28"
C	Bathing well length	44"
D	Bathing well width	19 1/8"
E	Deck width	7/8"
F	Deck width at headrest	1"
G	Center drain to air intake	4 1/4"
H	Total height	21"
I	Maximum water level	14 5/16"
J	Slope of backrest	27°
K	Base length	52 1/8"
L	Base width	22 1/8"
M	Outer edge to center of drain	10 1/8"

● Indicates heated backrest (TMU) ⊞ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A. 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A. 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the deck of the bath.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000078
Approx. shipping weight	225 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.