

vibe oval 5830

Freestanding
58" x 30" x 21"



Product No.

Model Freestanding TMU BVIAOF00T-XX Soaker BVIAOF00N-XX

ThermoMasseur (TMU)

Air Jet System	\$8,655
Jets	35
1 heated backrest	Included
MiaPlus® Control*	Included
BU-Touch Control Application BUTOUCH	\$495
Geysair®	Included
Illuzio Chromatherapy BCHRO6	\$995

Soaker

	\$6,430
Illuzio Chromatherapy BCHRO6	\$995
WarmTouchShell® BWTS	\$1,125
DOT Control	Included with therapy

Features

Installation Type	Freestanding
No. of bathers 1 Imp. gallons 34 US gallons 40	
Integrated Drain & Overflow — ZenFlow† BOVERINZF-01	
White 01	Installed & Included
Standard Bath Color p.17	
White 01	Included

Options UPCHARGE APPLICABLE

Bath Color p.17			
 Black / White 66	\$475		
Finish p.17			
UltraVelour Matte Finish (white only) <i>BVEL2</i>	\$850		
Universal Armrests <i>BGBGU-XX</i> p.16			
 White 01	\$895		
Bath Pillow <i>BPILLOW</i> p.252	\$240		
Drain & Overflow p.14			
 White 01	Integrated ZenFlow ¹ <i>BOVERINZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>	
 Matte White 32	Incl.	\$40	
 Chrome 07	\$40	\$70	
 Brushed Nickel 09	 Polished Nickel 10		
 Matte Black 19	 Satin Brass 18	\$95	\$125
Island Tub Drain™*** p.15			
Island Tub Drain™ <i>BISLDD</i>	\$260		
Cast iron island tub drain™ <i>BISLDDCI</i>	\$310		
If Required by Construction Code			
Brass drain & overflow Kit <i>BDRCOB</i>	\$240		
Brass drain kit <i>BDRCB</i>	\$60		


⚠ Don't forget to specify the finish of the Integrated drain & overflow.

† ZenFlow: Integrated overflow without a trim.
*** Control must be wall-mounted. Faucets must be freestanding or wall-mounted.
*** An Island Tub Drain™ is required when there is no access under the bath.




vibe oval 5830

Freestanding
58" x 30" x 21"

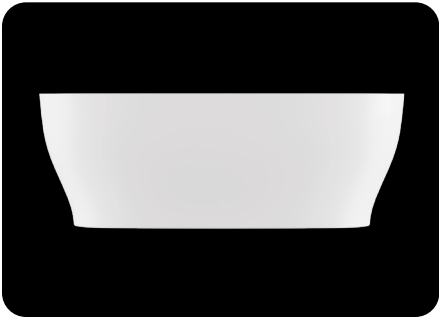

Technical Specifications

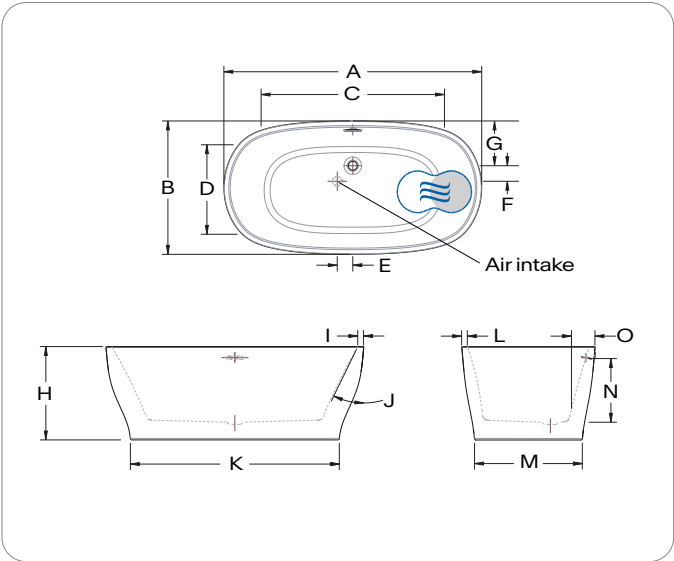

Letter	Description	Measure
A	Total length	58"
B	Total width	30"
C	Bathing well length	41 ¼"
D	Bathing well width	20 ⅞"
E	Center of air intake to center of drain (front)	3 ½"
F	Center of air intake to center of drain (side)	3 ½"
G	Outer edge to center of drain	10 ⅞"
H	Total height	21"
I	Deck width at headrest	1 ⅜"
J	Slope of backrest	26°
K	Base length	47"
L	Deck width	1 ⅜"
M	Base width	24 ¼"
N	Maximum water level	14 ⅝"
O	Minimum spout reach	5 ¾"

● Indicates heated backrest (TMU) ☞ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). Faucet must be freestanding or wall-mounted. The turbine must be remotely installed. Controls cannot be installed on the deck of the bath.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Cutting template	# 90000080
Approx. shipping weight	225 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.