

# THERMAL OVAL PLUS

66" x 38" x 19"

The name Thermal refers to the natural spas built near hot mineral springs. This collection evokes our animal origins by stressing the important role minerals play in the composition of our bodies.



## PRODUCT NO.

DESCRIPTION	TMU	TUB
	BTOMOD00T-XX	BTOMOD00N-XX

THERMOMASSEUR (TMU)	\$
Hydro-thermo massage • Air jet system	
Jets	42
1 heated backrest & headrest	Included
MiaPlus® Control	Included
Geysair®	Included
AromaCloud® BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$

TUB	\$
Soaker	
AromaCloud® BAROMAC	\$
Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy

## FEATURES

Installation type		Drop-in
No. of bathers	2	Armrests
US gallons	44	Grab bars (color match)
Imp. gallons	36	

## STANDARD COLOR

 White 01  Biscuit 02	Included
---	----------

## OPTIONS (UPCHARGE APPLICABLE)

### COLOR

 Gray 05	\$
---	----

### WASTE & OVERFLOW 16" x 35" BOVER16-XX

Chrome 07	\$
White 01, Biscuit 02	\$
Brushed Nickel 09, Polished Nickel 10, Oil-rubbed Bronze 11	\$

### CONTROL (TMU only)

MiaMulti® BMIAM2-XX	\$
---------------------	----

### CLEAR ACRYLIC GRAB BARS BGBG10-XX

With Chrome 07 or Brushed Nickel 09 inserts	\$
---	----

**TOTAL PRICE** \$




## THERMAL OVAL PLUS



Acrylic grab bar

### INSTALLATION

**A** Note: the AromaCloud® may interfere with faucet.

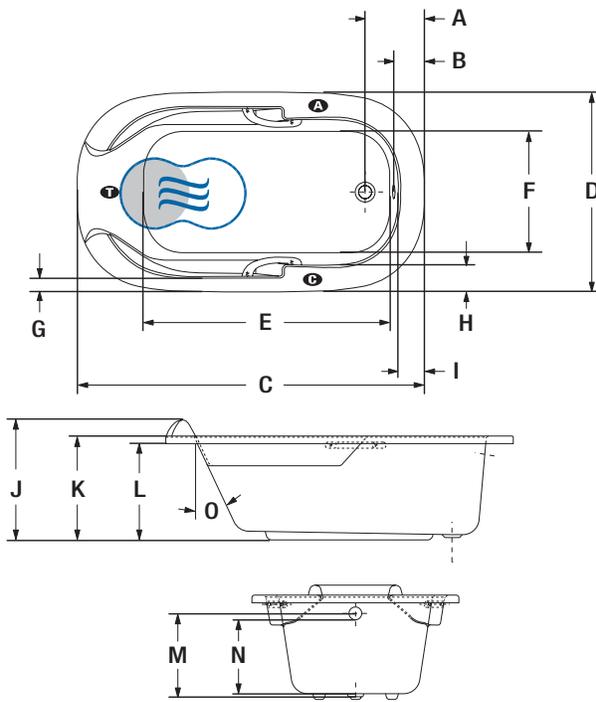

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	11 1/2"
B	Outside edge to overflow	5 1/4"
C	Total length	65 3/4"
D	Total width	37 7/8"
E	Bathing well length	46 1/2"
F	Bathing well width	23"
G	Deck width (narrowest point)	3"
H	Deck width (widest point)	5 1/8"
I	Deck width	5 1/8"
J	Total height to headrest	22 3/8"
K	Height from bottom of TUB to top deck	19 1/4"
L	Height from bottom of TUB to bottom of lip	17 7/8"
M	Height from drain to center of overflow	14 3/8"
N	Maximum water level	12 7/8"
O	Slope of backrest	28°

- A** AromaCloud® position
- B** Control position when factory-installed (Mia® or DOT)
- T** Turbine position (TMU)
- Indicates heated backrest (TMU)
- ☄ Indicates WarmTouchShell® position (TUB)

### TECHNICAL SPECIFICATIONS

<b>Hot water supply required</b>	Should be 70% of water capacity of TUB or greater.
<b>Turbine</b>	Access to the pump must be at least 18" x 22". <b>Standard connection is 20 A, 120 V, 60 hz</b> , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). <b>For any additional option, a second line is needed 15 A, 120 V, 60 hz</b> , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ([www.bainultra.com/documentation/documentation](http://www.bainultra.com/documentation/documentation)).

<b>Cutting template</b>	# 90000010
<b>Approx. shipping weight</b>	122 lbs
<b>Turbine power</b>	550 W
<b>Air heater</b>	600 W

#### WARRANTY

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

\* Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.